

BAR PUSH/PULL HANDLES


15076 + 1,200 mm

15075 + 1,000 mm

14030 + 800 mm

14020 + 600 mm

14010 + 320 mm

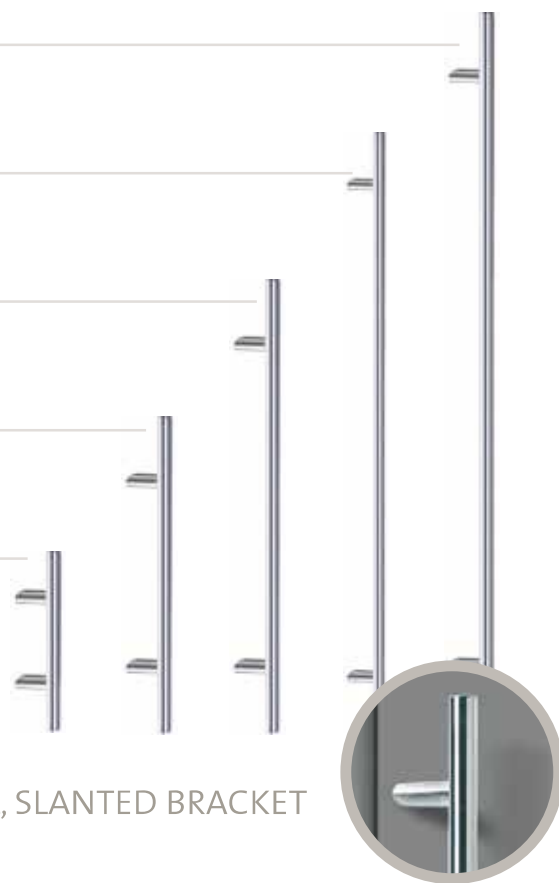

STAINLESS STEEL, SLANTED BRACKET

+ Round, Ø 30 mm

15279 + 1,600 mm

15277 + 1,400 mm


15276 + 1,200 mm

15275 + 1,000 mm

14032 + 800 mm

15220 + 600 mm

15210 + 320 mm

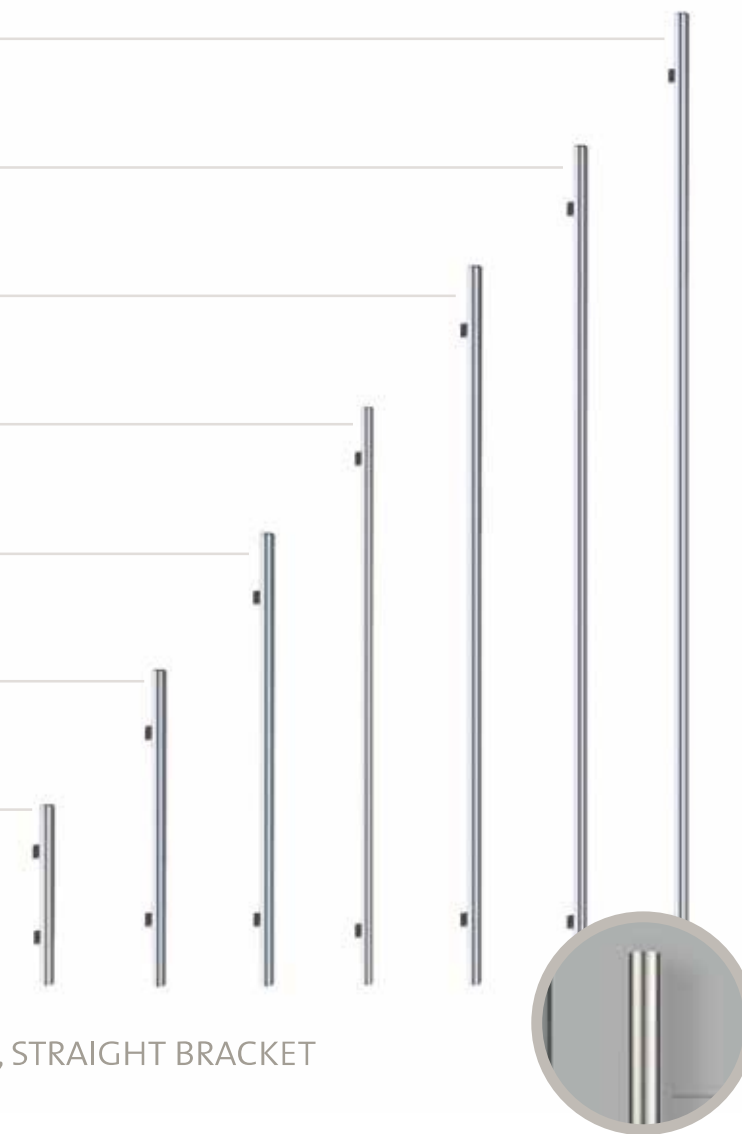

STAINLESS STEEL, STRAIGHT BRACKET

+ Round, Ø 30 mm

15692 + 2,000 mm 3. Console | Bracket

15682 + 1,800 mm 3. Console | Bracket

15672 + 1,600 mm 3. Console | Bracket

15662 + 1,400 mm


15652 + 1,200 mm

15642 + 1,000 mm

15632 + 800 mm

15622 + 600 mm

15612 + 400 mm

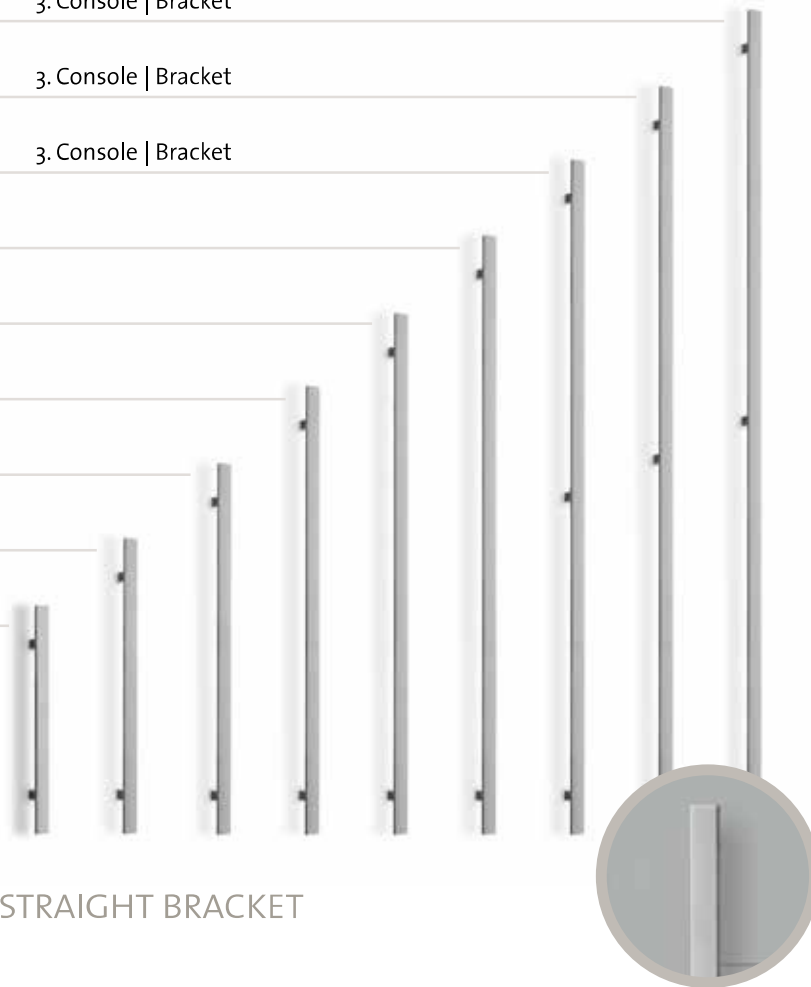

14160
+ 40 / 10 x 600 mm



22384
+ ENTRAsys Pull 05
+ Integrated finger scan
+ 50 / 10 x 1,000 mm



14050
+ W x H: 145 x 380 mm
+ Diameter: 30 mm



14100
+ W x H: 195 x 380 mm
+ Diameter: 30 mm



STAINLESS STEEL, STRAIGHT BRACKET

+ Rectangular, 40 / 10 mm

INTERIOR DOOR HANDLE



18600
+ Standard
+ RAL 9016, EV1, C34



18600 / 0053
+ Stainless steel



18900
+ DALLAS, stainless steel



18120/9016
+ With long plate



18120/0053
+ With long stainless steel plate



18901
+ STOCKHOLM, stainless steel

KNOBS FOR SAFETY CATCH LOCK



27701
+ RAL 9016,
EV1, C34



27701
+ Stainless
steel



27900
+ DALLAS,
stainless steel



27901
+ STOCKHOLM,
stainless steel

ROSETTE



19023
+ Standard



190XX
+ Armoured rosette
+ Cylinder overlay

SECURITY DOOR FITTING



18903
+ Liverpool security door fitting
+ With long exterior plate
+ Knob, offset
+ Cylinder core pull-out protection
+ RAL 9016, EV1, dark brown

SCRATCH GUARD



900088/89
+ For profile cylinder face

HINGES



23040
+ Standard hinge
+ RAL 9016,
EV1, C34




23091
+ Roller hinge
+ RAL 9016,
EV1, C34



23061
+ Concealed hinge

BASE STRIP

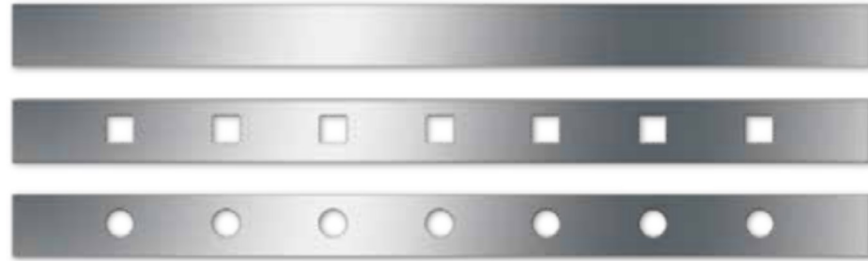

BASE TRIM IN STAINLESS STEEL FINISH

- + Kick plate
- + Sized as needed

BIOMETRIC SYSTEMS



22055
+ ENTRAsys
finger scanner



699626
+ Slider handheld
transmitter



699523
+ Classic handheld
transmitter



26105
+ Standard cylinder
+ 60 / 40 mm with 5 key



26050
+ Knob cylinder



26020
+ Security identify card
available

LOCKS



CLOSING HOOK

The standard 3-point hook bolt lock offers a saw-proof multiple lock which hooks in the rear striker plate with two upward-locking closing hooks.

"Safe locking thanks to closing hooks!"



20066

+ 3-point hook bolt lock



DOUBLE BOLT

The 5-point hook bolt lock unites all advantages of the closing hook and solid bolt systems in a "double bolt".

"Double holds better!"



20070

+ 5-point hook bolt lock



SECURY AUTOMATIC LATCHBOLT

The convenient GU-SECURY automatic lock system. Simply let the door click shut: The automatic latchbolts trigger 20 mm after the door is pulled shut and are then secured against pushing back movements - the door is locked without having to lock up. The lock systems can be opened from inside at any time with a lever handle and from outside with a turn the key.

"Secured without locking up!"



20027

- + Secury automatic lock
- + With 3-point deadlocked latchbolt
- + Minimum door height 1,900 mm

AUTO OPENER

The self-locking GU-SECURY multiple lock can also be equipped with an opening motor as an option.

The locked door is unlocked from a distance, e.g. with the button of the front door intercom system or buttons from different apartments. It works by moving the automatic latchbolts of the multiple lock back with a motor after pulse generation. It can be combined with any access control system outside. For example, a contact-free system with an electric key (transponder), a door code keypad or a finger scanner. The door can also be opened mechanically with the use of the lock in the closing cylinder.

With a mounted A-opener, the lock system is well-suited for barrier-free buildings in accordance with DIN 18040.

20028

- + Secury automatic lock
- + With 3-point deadlocked latchbolt
- + A-opener function